



CSI Cable & Supplies, Inc PS-10GS 10 Hz 350 Ohm

(Equivalent to SG-10 ®)



CORPORATE SALES

Jeff Buis

jeff.buis@csicablessupplies.com

Larry Aguirre

larry.aguirre@csicablessupplies.com


Tony Martinez

antonio.martinez@csicablessupplies.com


Information:

info@csicablessupplies.com

PS-10 GS AMPLITUDE FREQUENCY CURVE

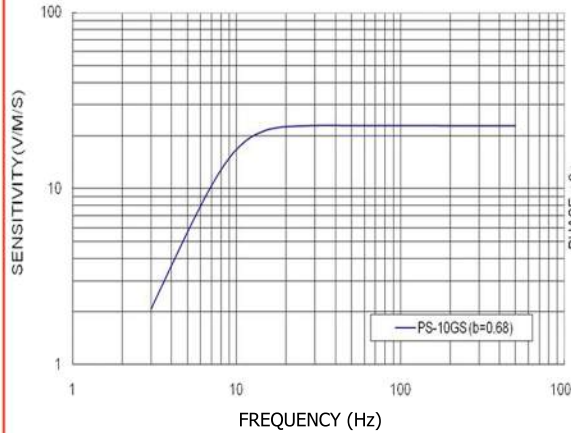

PS-10 GS PHASE FREQUENCY CURVE

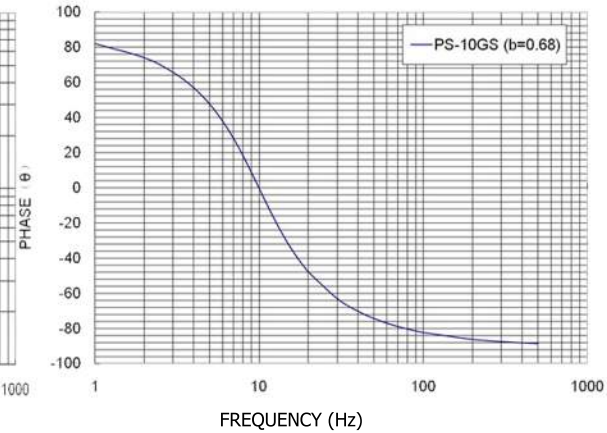

The PS-10GS Geophone is designed with reliable and advanced technology. It has high spurious frequency. The tolerance of all parameters is controlled within +/- 2.5%, in addition, the distortion is less than 0.1%.

MAIN SPECIFICATION:

GEOPHONE ELEMENT (PS-10GS : 20 °C)

Frequency (Hz) :	10 +/- 2.5%
Distortion (%) :	≤ 0.075
Damping:	0.68 +/- 4%
Coil Resistance (Ω):	350 +/- 2.5%
Sensitivity:	
Sensitivity (V/m/s):	22.8 +/- 2.5%
Max. Coil Excursion (mm):	1.78mm
Physical Characteristics:	
Dimensions (mm) :	27.4 X 30.15
Temperature Range (°C):	-40 ~+ 90
Manufacturer Warranty Period (year):	2

*Note: CSI reserves the right to change its specifications without prior notice.

SCAN THIS QR CODE

WITH YOUR SMARTPHONE

TO BE DIRECTED TO THE WEBSITE



CSI Cable & Supplies, Inc

1115 Staffordshire Rd • Stafford, TX 77477 USA

Tel: 281.741.2295 • Fax: 281.741.2829

www.CSICableSupplies.com