

CSI Cable & Supplies, Inc.
PS-10XS 10 Hz 395 Ohm
 (Equivalent to GS-32CT ®)



CORPORATE SALES


Jeff Buis
 jeff.buis@csicablesupplies.com

Larry Aguirre
 larry.aguirre@csicablesupplies.com


Tony Martinez
 antonio.martinez@csicablesupplies.com

Information:
 info@csicablesupplies.com

PS-10XS AMPLITUDE FREQUENCY CURVE

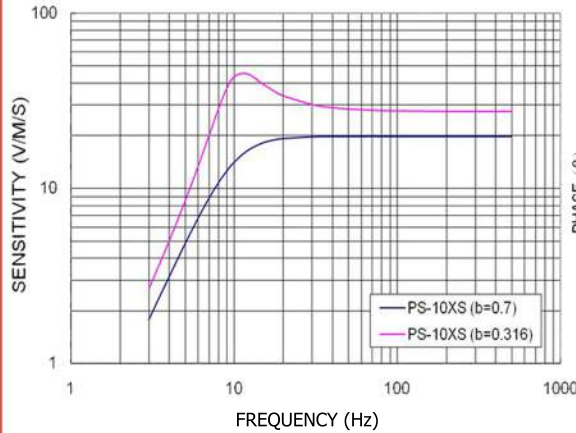

PS-10XS PHASE FREQUENCY CURVE

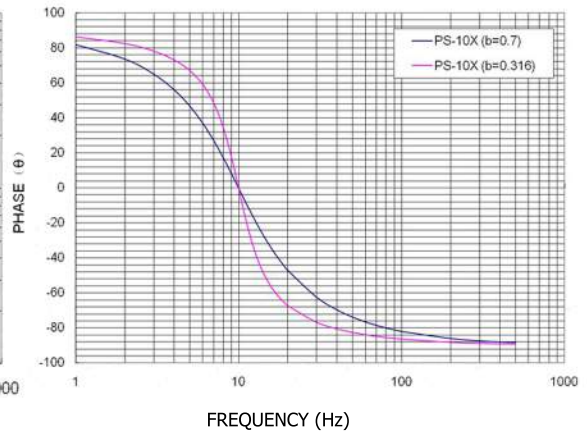

The PS-10XS Geophone is designed with reliable and advanced technology. It has high spurious frequency. The tolerance of all parameters is controlled within +/- 2.5%, in addition, the distortion is less than 0.1%

MAIN SPECIFICATION:

GEOPHONE ELEMENT (PS-10XS: 25 °C)

Frequency (Hz) :	10 +/- 2.5%
Distortion (%):	≤ 0.1
Damping:	+/- 2.5%
Coil Resistance (Ω):	0.316 +/- 2.5%
Sensitivity:	
Sensitivity (V/m/s):	27.5 +/- 2.5%
Max. Coil Excursion (mm):	1.5mm
Physical Characteristics:	
Dimensions (mm) :	25.4 X 34
Temperature Range (°C):	-40 ~+ 100
Manufacturer Warranty Period (year):	3

*Note: CSI reserves the right to change its specifications without prior notice.

SCAN THIS QR CODE
 WITH YOUR SMARTPHONE
 TO BE DIRECTED TO THE WEBSITE



CSI Cable & Supplies, Inc.

1115 Staffordshire Rd • Stafford, TX 77477 USA
 Tel: 281.741.2295 • Fax: 281.741.2829

www.CSICableSupplies.com