




CSI Cable & Supplies, Inc. PS-25 Hydrophone 10 Hz 155 Ohm

SHALLOW WATER HYDROPHONE



PS-25 AMPLITUDE FREQUENCY CURVE

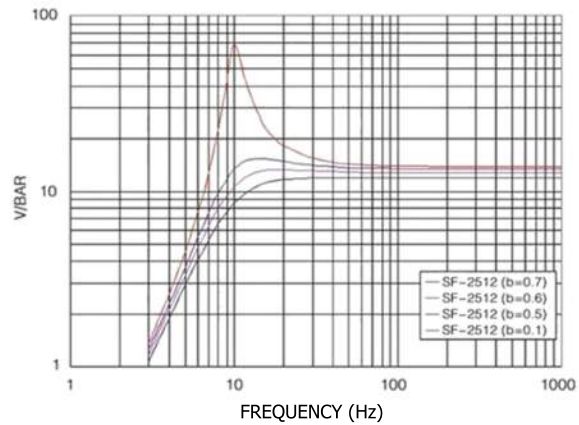

CORPORATE SALES

Jeff Buis

jeff.buis@csicablesupplies.com

Larry Aguirre

larry.aguirre@csicablesupplies.com

Tony Martinez

antonio.martinez@csicablesupplies.com

Information:

info@csicablesupplies.com

SCAN THIS QR CODE

WITH YOUR SMARTPHONE

TO BE DIRECTED TO THE WEBSITE



MAIN SPECIFICATION:

GEOPHONE ELEMENT (PS-25 Hydrophone: 20 °C)

Frequency (Hz) :	10 +/- 10%
Sensitivity ($\mu\text{V}/\mu\text{bar}$):	14 +/- 15%
DC Resistance (Ω):	155 +/- 10%
Insulation Resistance ($\text{M}\Omega$):	≥ 100
Physical Characteristics:	
Dimensions (mm) :	66 X 150
Weight (g):	600
Operating Temperature ($^{\circ}\text{C}$):	0 ~ 35
Warranty Period (year):	1
Maximum Operating Depth (m):	75
Polarity:	Negative

*Note: CSI reserves the right to change its specifications without prior notice.

CSI Cable & Supplies, Inc.

1115 Staffordshire Rd • Stafford, TX 77477 USA

Tel: 281.741.2295 • Fax: 281.741.2829

www.CSICableSupplies.com