




PS-4.5 B AMPLITUDE FREQUENCY CURVE

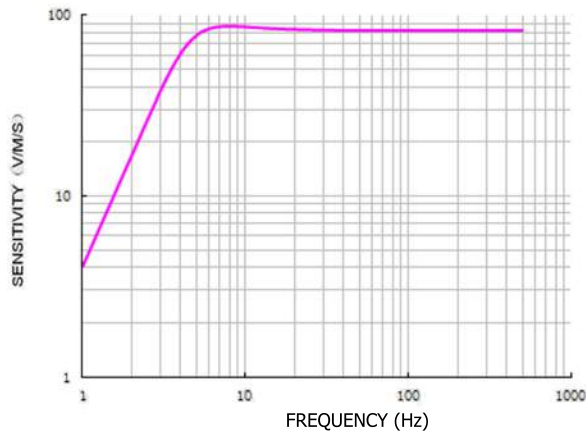

CORPORATE SALES

Jeff Buis

jeff.buis@csicablesupplies.com

Larry Aguirre

larry.aguirre@csicablesupplies.com

Tony Martinez

antonio.martinez@csicablesupplies.com

Information:

info@csicablesupplies.com

SCAN THIS QR CODE

WITH YOUR SMARTPHONE
TO BE DIRECTED TO THE WEBSITE



MAIN SPECIFICATION:

GEOPHONE ELEMENT (PS-4.5C: 20 °C)

Frequency (Hz) :	4.5 +/- 10%
Distortion (%) :	≤0.3
Damping:	0.58 +/- 20%
Coil Resistance (Ω):	3400 +/- 10%
Sensitivity:	
Sensitivity (V/m/s):	82 +/- 7.5%
Max. Coil Excursion (mm):	4mm
Physical Characteristics:	
Dimensions (mm):	25.4 X 36
Weight (g):	80
Temperature Range (°C):	-40~+70
Manufacturer Warranty Period (year):	1

CSI Cable & Supplies, Inc.

1115 Staffordshire Rd • Stafford, TX 77477 USA

Tel: 281.741.2295 • Fax: 281.741.2829

www.CSICableSupplies.com