


CSI Cable & Supplies, Inc.
PS-5R 5 Hz 2950 Ohm




PS-5R AMPLITUDE FREQUENCY CURVE

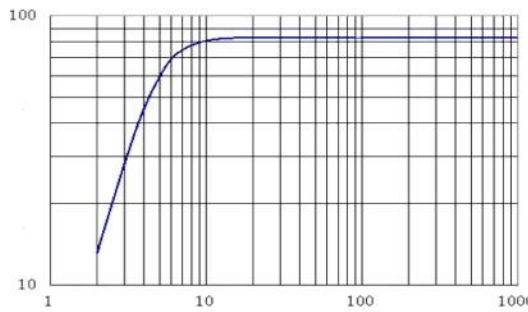

— PS-5R (S) (b=0.7)

PS-5R PHASE FREQUENCY CURVE

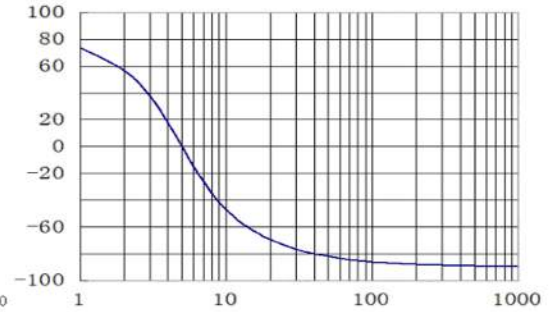

— PS-5R (S) (b=0.7)

FREQUENCY (Hz)

CORPORATE SALES

Jeff Buis

jeff.buis@csicablesupplies.com

Larry Aguirre

larry.aguirre@csicablesupplies.com

Tony Martinez

antonio.martinez@csicablesupplies.com

Information:

info@csicablesupplies.com

SCAN THIS QR CODE

WITH YOUR SMARTPHONE
 TO BE DIRECTED TO THE WEBSITE



MAIN SPECIFICATION:

GEOPHONE ELEMENT (PS-5R: 20 °C)

Frequency (Hz) :	5 +/- 0.75
Distortion (%):	≤0.2
Damping:	0.7 +/- 15%
Coil Resistance (Ω):	2950 +/- 5%
Sensitivity:	
Sensitivity (V/m/s):	83 +/- 8%
Moving Mass (g):	17 g
Physical Characteristics:	
Dimensions (mm) :	30.2 D X 40 H
Weight (g):	140 g
Temperature Range (°C):	-40~+100
Manufacturer Warranty Period (year):	3

*Note: CSI reserves the right to change its specifications without prior notice.

CSI Cable & Supplies, Inc.

1115 Staffordshire Rd • Stafford, TX 77477 USA

Tel: 281.741.2295 • Fax: 281.741.2829

www.CSICableSupplies.com