



CSI Cable & Supplies, Inc.  
**PS-10R UNI 10 Hz 1800 Ohm**  
 HIGH SENSITIVITY - SINGLE GEOPHONE



**CORPORATE SALES**

**Jeff Buis**

jeff.buis@csicablessupplies.com

**Larry Aguirre**



larry.aguirre@csicablessupplies.com

**Tony Martinez**

antonio.martinez@csicablessupplies.com

**Information:**

info@csicablessupplies.com

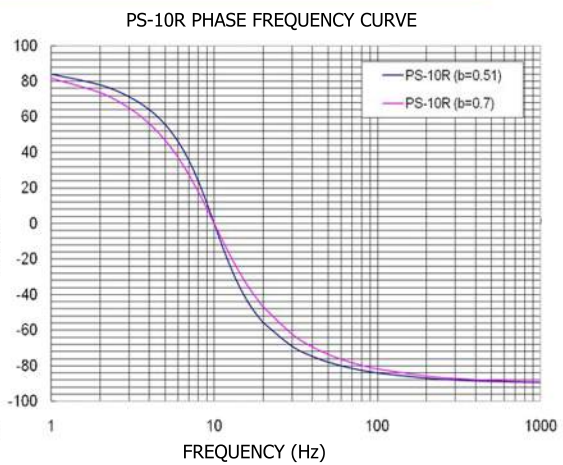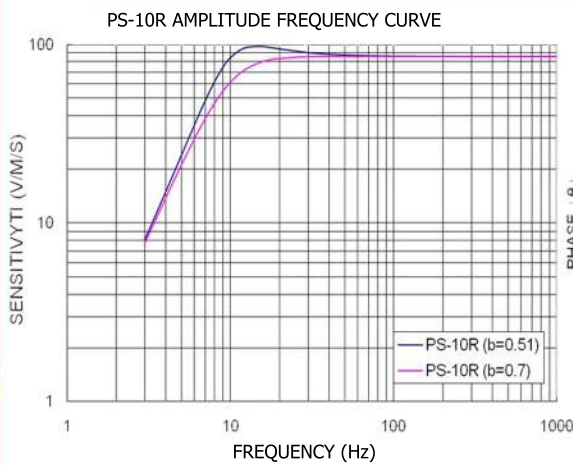

The PS-10R is a high sensitivity geophone suitable for both single point acquisition and geophone combination acquisition.

**MAIN SPECIFICATION:**

**GEOPHONE ELEMENT (PS-10R : 25 °C)**

<b>Frequency (Hz) :</b>	10 +/- 3.5%
<b>Distortion (%):</b>	≤ 0.1
<b>Damping:</b>	0.48 - 0.54%
<b>Coil Resistance (Ω):</b>	1800 +/- 3.5%
<b>Sensitivity:</b>	
Sensitivity (V/m/s):	85.8 +/- 3.5%
Max. Coil Excursion (mm):	2.54mm
<b>Physical Characteristics:</b>	
Dimensions (mm) :	30.2 X 39.9
Manufacture Warranty Period (year):	3
Temperature Range (°C):	-40 - +100 °C
Weight:	140.9 g
Manufacturer Warranty Period (year):	3 years

\*Note: CSI reserves the right to change its specifications without prior notice.

**SCAN THIS QR CODE**

WITH YOUR SMARTPHONE  
 TO BE DIRECTED TO THE WEBSITE



**CSI Cable & Supplies, Inc.**

1115 Staffordshire Rd • Stafford, TX 77477 USA  
 Tel: 281.741.2295 • Fax: 281.741.2829

**www.CSICableSupplies.com**