



CSI Cable & Supplies, Inc.  
**PS-5RS 5 Hz 2950 Ohm**



PS-5RS AMPLITUDE FREQUENCY CURVE

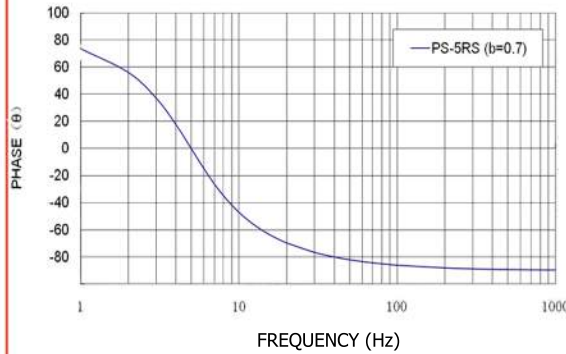

PS-5RS PHASE FREQUENCY CURVE

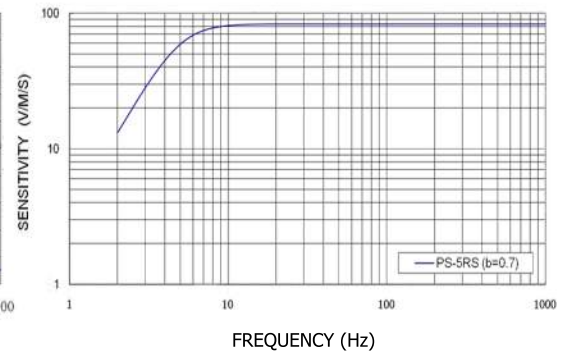

**CORPORATE SALES**

**Jeff Buis**

jeff.buis@csicablesupplies.com

**Larry Aguirre**

larry.aguirre@csicablesupplies.com

**Tony Martinez**

antonio.martinez@csicablesupplies.com

**Information:**

info@csicablesupplies.com

**SCAN THIS QR CODE**

WITH YOUR SMARTPHONE  
 TO BE DIRECTED TO THE WEBSITE



**MAIN SPECIFICATION:**

**GEOPHONE ELEMENT (PS-5RS: 20 °C)**

<b>Frequency (Hz) :</b>	5 +/- 7.5%
<b>Distortion (%):</b>	≤0.1
<b>Damping:</b>	0.7 +/- 5%
<b>Coil Resistance (Ω):</b>	2950 +/- 5
<b>Sensitivity:</b>	
Sensitivity (V/m/s):	83 +/- 5%
Moving Mass (g):	17 g
<b>Physical Characteristics:</b>	
Dimensions (mm) :	30.2 D X 40 H
Weight (g):	140
Temperature Range (°C):	-40~+100
Manufacturer Warranty Period (year):	1

\*Note: CSI reserves the right to change its specifications without prior notice.

**CSI Cable & Supplies, Inc.**

1115 Staffordshire Rd • Stafford, TX 77477 USA

Tel: 281.741.2295 • Fax: 281.741.2829

**www.CSICableSupplies.com**